

GIOTTO QUICK GUIDE



**HEAVY
DUTY**



**MAX DIVE
DEPTH ALARM**

**AIR/EARN
GAGE/FREE
MULTIMODE**



**LONG LASTING
BATTERY**



**EASY ACCESS
MENU**



**LOGBOOK
60 DIVES**



**AIR - APNEA
3 GAS NITROX**



**BACKLIT
DISPLAY**



**12/24 TIME
AND CALENDAR**



**DOWNLOAD THE
COMPLETE CRESSI
INSTRUCTION MANUAL at:**
www.cressi.com/manuals



WARNING

- **INGESTION HAZARD:** This product contains a button cell or coin battery.
- **INGESTION HAZARD:** The product contains non user replaceable cell batteries.
- **DEATH** or serious injury can occur if ingested.
- A swallowed button cell or coin battery can cause **Internal Chemical Burns** in as little as **2 hours**.
- **KEEP** new and used batteries **OUT OF REACH of CHILDREN**.
- **Seek immediate medical attention** if a battery is suspected to be swallowed or inserted inside any part of the body.
- **BATTERY TYPE:** CR2430.
- **NOMINAL VOLTAGE:** 3V.



WARNING

- Remove and immediately recycle or dispose of used batteries according to local regulations and keep away from children. Do NOT dispose of batteries in household trash or incinerate.
- Even used batteries may cause severe injury or death.
- Call a local poison control center for treatment information.
- **BATTERY TYPE: CR2430.**
- **NOMINAL VOLTAGE: 3V.**
- Non-rechargeable batteries are not to be recharged.
- Do not force discharge, recharge, disassemble, heat above (manufacturer's specified temperature rating) or incinerate. Doing so may result in injury due to venting, leakage or explosion resulting in chemical burns.

Cressi reserves the right to make changes to the instrument without notice, based on the incessant technological upgrade of its components.

OPERATING BUTTONS



SCROLL DOWN (short press)

- decrease one step



In surface or dive mode:
SCROLL UP (short press)

- Increase one step

(long press)

- return to the TOP menu
- switch depth AVG/stopwatch (GAGE mode)



(long press)

- enter the function or confirm
- light is available in:
 - dive mode
 - time
 - post dive

SWITCH ON

PUSH **ESC** OR **SEL** TO SWITCH ON THE COMPUTER

PRE DIVE




* In case of desat time, in mode AIR, FREE, GAGE the computer will alternate the pre dive screen to that of desat screen.

In case of desat time in mode NITROX the computer will alternate the pre dive screen to that of GAS screen. GAS, GAS 1/2/3 (depending on the setting).

PRE DIVE (DESAT)*



THE SCREEN SCROLL AUTOMATICALLY EVERY TWO SECONDS



DEEP STOP INDICATOR

STAGE INDICATOR

HIGH SPEED ASCENT

OXYGEN

OXYGEN TOXICITY BAR


PP0₂ VIOLATION

ASCENT ALARM SPEED OFF

SAFETY FACTOR INDICATOR

BATTERY LOW

ALTITUDE MODE

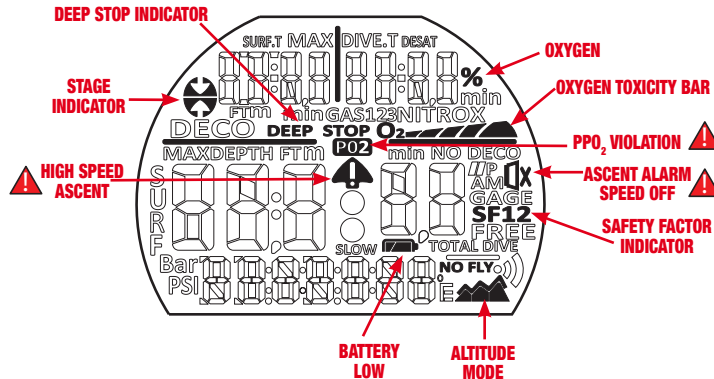

MAIN SURFACE MENU


PRE DIVE



TIME



MODE SET



↑ **ESC** **SEL** ↓


AIR (AIR MODE)
EAN (NITROX MODE)
FREE (APNEA MODE)
GAGE (GAUGE MODE)

◀ **SEL** TO CONFIRM ▶

SEL TO RETURN

ESC TO RETURN

LOGBOOK



↑ **ESC** **SEL** ↓



◀ **SEL** TO VIEW LOG DETAILS ▶

SEL TO RETURN



ESC TO RETURN

DIVE-SET



↑ **ESC** **SEL** ↓

AIR (AIR MODE)

- Depth ON/OFF
- PPO₂ 1.2 - 1.6
- Safety Factor SF 0/1/2
- Altitude ALT 0/1/2/3

EAN (NITROX MODE)

- Deep stop ON/OFF
- Safety Factor SF 0/1/2
- Altitude ALT 0/1/2/3
- Depth Alarm OFF/50-10m (164-30FT)
- GAS1 21-50% O₂
- GAS1 PPO₂ 1.2
- GAS2 OFF/21-99% O₂
- GAS2 PPO₂ 1.2
- GAS3 OFF/21-99% O₂
- GAS3 PPO₂ 1.2-1.6

FREE (APNEA MODE)

- Surf Time Alarm SURF-T F1-F5 (surf time factor) /1':00"-10':00"/OFF
- Depth Alarm DEPTH 1 - 50 m. (3-164 FT)/OFF
- Step Depth Alarm STEP 2 - 25 m. (6-82 FT)/OFF
- Dive Time Alarm DIVE-T 0':10"-6':00"/OFF

GAGE (GAUGE MODE)

- Depth Alarm OFF/50-10m (164-30 FT)

◀ **SEL** TO CONFIRM ▶

SEL TO RETURN

ESC TO RETURN

TIME SET



↑ **ESC** **SEL** ↓


- SET H. 12/24
- SET HOUR
- SET MINUTE
- SET D-M/M-D
- SET DAY or MONTH
- SET MONTH or DAY
- SET YEAR

◀ **SEL** TO CONFIRM ▶


SEL TO RETURN

ESC TO RETURN

PLANNING



↑ **ESC** **SEL** ↓



◀ **SEL** TO CONFIRM ▶


SEL TO RETURN

ESC TO RETURN

NOT AVAILABLE IN
 FREE MODE / GAGE MODE

MAIN SURFACE MENU

PC LINK



CONNECT THE INTERFACE



AND DOWNLOAD LATEST
SOFTWARE UPDATES
USB (PC/MAC)



BLUETOOTH Cressi App
App Store (iOS)
Playstore/App Gallery (Android)

SETTING & INFO SYSTEM



SYSTEM MENU

CHANGE UNITS



SEL TO CHANGE
(C° M / F-FT)

ESC TO RETURN

HISTORY




MAX
DEPTH
HISTORY

HOURS
IN USE
COUNTER

ESC TO RETURN

INFO



FIRMWARE
VERSION

SERIAL
NUMBER

NUMBER
OF BATTERY
CHANGES

HIGH SPEED ASCENT ALARM



SEL SCROLL TO CHANGE
ON/OFF ALARM SPEED

ESC TO RETURN



An ascent at too high speed increases the risk of decompression sickness! This function is strictly reserved for instructors who take full responsibility for the disactivation of the high speed ascent alarm (AL.SP).

In any event, when activating this function the computer will show a barred speaker icon during the entire dive.



TISSUE ERASE



ESC **SEL**



SEL SCROLL TO CHANGE NO / YES
AND PUSH FOR 5 SEC.
TO ERASE THE TISSUE



ESC

TO RETURN





If you decide to erase the tissue nitrogen saturation using the T.ERASE function, the computer will not be able to calculate any successive dives in relation to nitrogen saturation! In any event, do not use this function if 48 hours have not passed since the last dive.

AIR (AIR MODE)




FREE (APNEA MODE)




PPO₂ MAX
DEPTH


NO
DECO TIME

NITROX


PPO₂ MAX DEPTH GAS 1 GAS INDICATOR
E PPO₂ MAX GAS 2 02% GAS 2

FREE


DEPTH	DIVE TIME (SEC.)
10	10
20	20
30	30
40	40
50	50
60	60
70	70
80	80
90	90
100	100
110	110
120	120
130	130
140	140
150	150
160	160
170	170
180	180
190	190
200	200
210	210
220	220
230	230
240	240
250	250
260	260
270	270
280	280
290	290
300	300
310	310
320	320
330	330
340	340
350	350
360	360
370	370
380	380
390	390
400	400
410	410
420	420
430	430
440	440
450	450
460	460
470	470
480	480
490	490
500	500
510	510
520	520
530	530
540	540
550	550
560	560
570	570
580	580
590	590
600	600
610	610
620	620
630	630
640	640
650	650
660	660
670	670
680	680
690	690
700	700
710	710
720	720
730	730
740	740
750	750
760	760
770	770
780	780
790	790
800	800
810	810
820	820
830	830
840	840
850	850
860	860
870	870
880	880
890	890
900	900
910	910
920	920
930	930
940	940
950	950
960	960
970	970
980	980
990	990
1000	1000

GAGE

DEPTH	DIVE TIME (SEC.)
10	10
20	20
30	30
40	40
50	50
60	60
70	70
80	80
90	90
100	100
110	110
120	120
130	130
140	140
150	150
160	160
170	170
180	180
190	190
200	200
210	210
220	220
230	230
240	240
250	250
260	260
270	270
280	280
290	290
300	300
310	310
320	320
330	330
340	340
350	350
360	360
370	370
380	380
390	390
400	400
410	410
420	420
430	430
440	440
450	450
460	460
470	470
480	480
490	490
500	500
510	510
520	520
530	530
540	540
550	550
560	560
570	570
580	580
590	590
600	600
610	610
620	620
630	630
640	640
650	650
660	660
670	670
680	680
690	690
700	700
710	710
720	720
730	730
740	740
750	750
760	760
770	770
780	780
790	790
800	800
810	810
820	820
830	830
840	840
850	850
860	860
870	870
880	880
890	890
900	900
910	910
920	920
930	930
940	940
950	950
960	960
970	970
980	980
990	990
1000	1000




PPO₂ MAX DEPTH GAS 2 GAS INDICATOR



PPO₂ MAX DEPTH GAS 3 GAS INDICATOR


DIVE MENU

AIR




PAGE SCROLL

(Page 2)




NITROX




PAGE SCROLL

(Page 2)





NITROX GAS SWITCH




ESC TO ENTER THE GAS CHANGE MODE

SCROLL TO CHOOSE PRESET GAS2 OR GAS3

SEL TO CONFIRM THE CHOSEN GAS




FREE




PAGE SCROLL

(Page 2)




GAGE



PAGE SCROLL

(Page 2)



ESC TO ENTER/ESC THE DEPTH STOPWATCH




TO START/STOP DEPTH STOPWATCH


TO RESET DEPTH STOPWATCH

POST DIVE

AIR




NITROX




SWITCH OFF
AUTOMATICALLY IN 10 MIN.

SURFACE

FREE



TO END THE APNEA SESSION, PUSH **ESC**



AND CONFIRM **SEL**

THE APNEA SESSION END AUTOMATICALLY AFTER 30 MIN.

BATTERY



LOW BATTERY
(YOU SHOULD CHANGE THE BATTERY SOON)



YOU MUST CHANGE THE BATTERY
(DIVE FUNCTION IS DISABLED)



The battery capacity guarantees operation that goes far beyond the guarantee time.

If the watch is opened before 2 years from the date purchase, the warranty is void.



This manual is 100% recyclable.
Please waste properly or keep it for
future reference.



PAPER - WASTE SORTING

Check the instructions of your
municipality or the authorized facilities

Manuale - PAP - Raccolta Carta
Verifica le disposizioni del tuo Comune.



FR

ARTICLES
DE SPORT



ASSOCIATION

OU



MAGASIN

OU



DÉCHÈTERIE



FR



QUALITY PRODUCTS
SINCE 1946

Cressi Italy Headquarters

Cressi Sub S.P.A.
Via G. Adamoli, 501
16165 Genova - Italy
Tel. +39 010 830 791
info@cressi.com



REV. 02_2024_P.P.1975