

NEPTO / KING QUICK GUIDE



**DOWNLOAD THE
COMPLETE CRESSI
INSTRUCTION MANUAL at:
www.cressi.com/manuals**



WARNING

- **INGESTION HAZARD:** This product contains a button cell or coin battery.
- **INGESTION HAZARD:** The product contains non user replaceable cell batteries.
- **DEATH** or serious injury can occur if ingested.
- A swallowed button cell or coin battery can cause **Internal Chemical Burns** in as little as **2 hours**.
- **KEEP** new and used batteries **OUT OF REACH of CHILDREN**.
- **Seek immediate medical attention** if a battery is suspected to be swallowed or inserted inside any part of the body.
- **BATTERY TYPE:** CR2450R.
- **NOMINAL VOLTAGE:** 3V.



WARNING

- Remove and immediately recycle or dispose of used batteries according to local regulations and keep away from children. Do NOT dispose of batteries in household trash or incinerate.
- Even used batteries may cause severe injury or death.
- Call a local poison control center for treatment information.
- **BATTERY TYPE: CR2450R.**
- **NOMINAL VOLTAGE: 3V.**
- Non-rechargeable batteries are not to be recharged.
- Do not force discharge, recharge, disassemble, heat above (manufacturer's specified temperature rating) or incinerate. Doing so may result in injury due to venting, leakage or explosion resulting in chemical burns.






The data provided by the tide graph are not intended for professional use but are to be considered exclusively as representations.

CRESSI SUB don't assumes responsibility for any losses that may result from the use of this watch.

Cressi reserves the right to make changes to the instrument without notice, based on the incessant technological upgrade of its components.


OPERATING BUTTONS

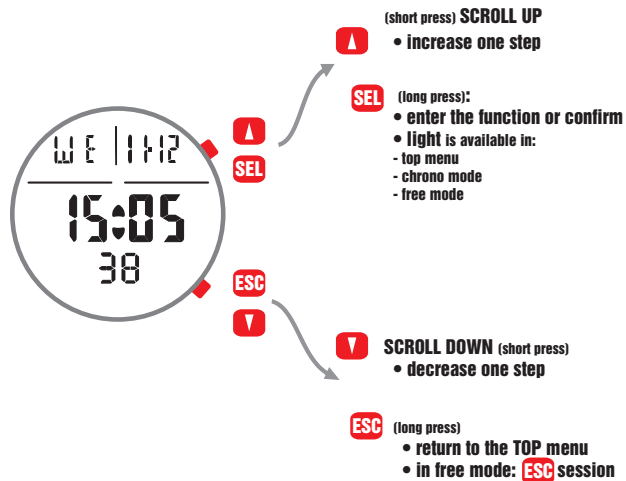

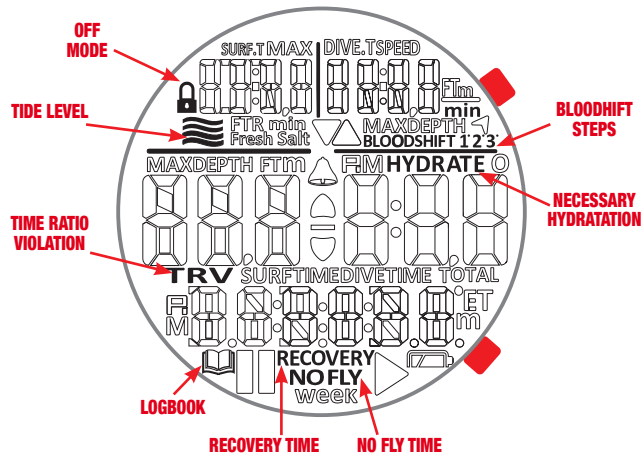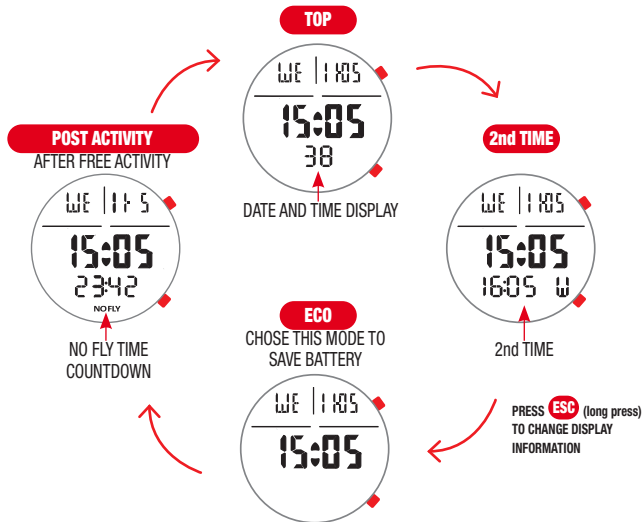

MAIN SURFACE MENU

CHRONO




↓ **SEL** TIME
↑ **ESC** HOURS



▲ **START / STOP**
▼ **LAP / RESET**
ESC TO RETURN

TIMER




↓ **SEL** TIME
↑ **ESC** HOURS



• SET HOURS
• SET MINUTES
• SET SECONDS
Scroll the SET and confirm **SEL**
▲ **START / STOP**
▼ **RESET**
ESC TO RETURN

DUAL TIMER




↓ **SEL** PHASE1/2
↑ **ESC** CYCLE



• SET SECONDS PHASE 1
• SET MINUTES PHASE 1
• SET SECONDS PHASE 2
• SET MINUTES PHASE 2
• SET THE NUMBER OF CYCLES AND CYCLE DIRECTION
Scroll the SET and confirm **SEL**
▲ **START / STOP**
▼ **RESET**
ESC TO RETURN

MODE SELECT




↓ **SEL**
↑ **ESC**



* **OFF (LOCK MODE)**
▲ Scroll the MODE and confirm **SEL**
* In the off function only the surface function are enable

LOGBOOK




↓ **SEL**
↑ **ESC**



LOG FREE see page 14

FREE SET



↓ **SEL**
↑ **ESC**

- Taravana Protection Level set **TARAV.** OFF/L1-L8
- Bloodshift protection set **BLOODSH.** OFF/30-120m(98-349FT)
- Surf Time Alarm set **SURF T.** OFF/1':00"-10':00"
- Depth Alarm set **DEPTH AL.** 1/2/3/4/5 OFF/10-120m(33-394FT)
- Dive Time Alarm set **DIVE T.** OFF/0':10"-6':00"
- Step Depth Alarm set **STEP** OFF/2-25m(6-82FT)
- Hydration Time Alarm set **HYD** OFF/1-4 HOURS
- Water Salinity set **WATR** Fresh/Salt
- Logbook Sample Rate set **LOG.SAM.** 0.5-1-2 Second

TIME SET




↓ **SEL**
↑ **ESC**

- SLEEP ALARM ON/OFF
 - SET HOUR
 - SET MINUTE
 - SET H. 12/24
 - SET HOUR
 - SET MINUTE
 - SET D-M/M-D
 - SET DAY or MONTH
 - SET MONTH or DAY
 - SET YEAR

▲ Scroll the SET and confirm **SEL**
▲ Scroll +/- and confirm **SEL**
ESC TO RETURN

SETTING & INFO SYSTEM





↓ **SEL**
↑ **ESC**



▲ Scroll the SET and confirm **SEL**
▲ Scroll +/- and confirm **SEL**
ESC TO RETURN
- SET 2nd TIME ON/OFF
▲ Scroll +/- 30 Min. and confirm **SEL**

PRE DIVE

SYSTEM MENU




AND DOWNLOAD LATEST
SOFTWARE UPDATES
USB (PC/MAC)



BLUETOOTH Cressi App
AppStore (iOS)
Playstore/ App Gallery
(ANDROID)

CHANGE UNITS



SEL TO CHANGE
(C° m / F-FT)

ESC TO RETURN

HISTORY



ESC TO RETURN

INFO



SEL TO CHANGE
(C° m / F-FT)

ESC TO RETURN

TIDE-SET



SWITCH TO YES AND PUSH **SEL**
TO SET THE LOCAL NEXT HIGH TIDE TIME



SEL TO CONFIRM **ESC** TO RETURN

THRESHOLD-SET




SEL TO CHANGE
LOW/HIGH

ESC TO RETURN

The threshold setting
allows to change the
depth activation
of the pressure sensor.

SLEEP MODE



SEL TO CHANGE
LOW/HIGH

ESC TO RETURN




The sleep mode allows
you to save battery power
in periods of not use the instrument
SWITCH TO YES
AND PUSH **SEL**
TO PUT THE WATCH INTO SLEEP
MODE OR **ESC** TO RETURN





**Exit this mode before
entering underwater**

LOGBOOK MENU FREE MODE

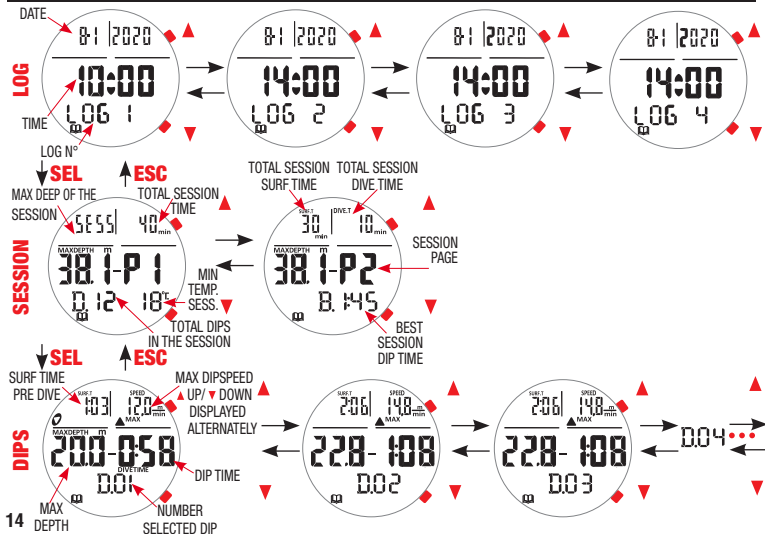

FREEDIVE ACTIVITIES

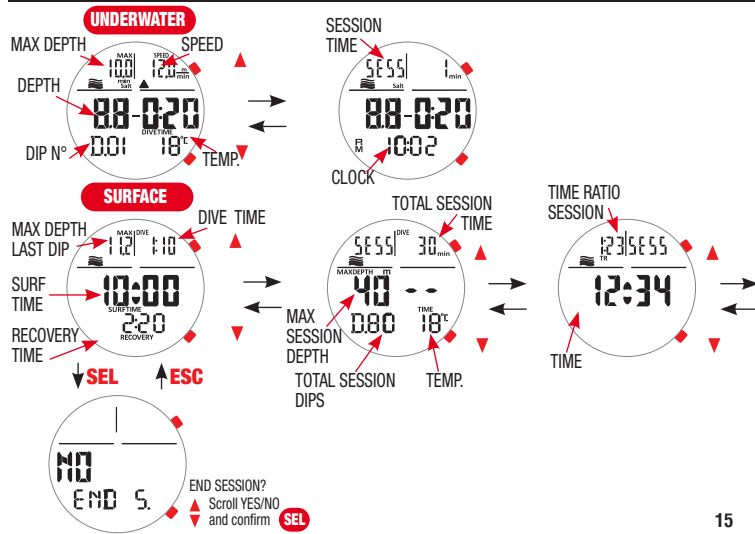

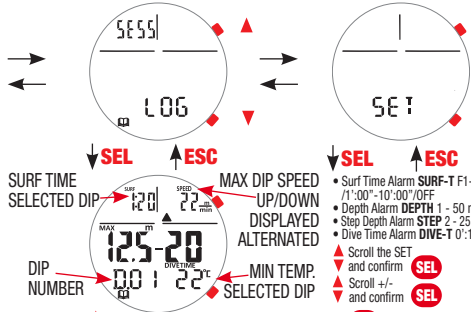

16 PRESS TO SCROLL THE DATA INTO THE SESSION

- Surf Time Alarm **SURF-T** F1-F5 (surf time factor) /1':00"-10':00"/OFF
- Depth Alarm **DEPTH** 1 - 50 m. (3-164 FT)/OFF
- Step Depth Alarm **STEP** 2 - 25 m. (6-82 FT)/OFF
- Dive Time Alarm **DIVE-T** 0':10"-6':00"/OFF
- ▲ Scroll the SET and confirm **SEL**
- ▲ Scroll +/- and confirm **SEL**
- ESC** TO RETURN

BATTERY



LOW BATTERY
(YOU SHOULD CHANGE THE BATTERY SOON)



YOU MUST CHANGE THE BATTERY
(DIVE FUNCTION IS DISABLED)



The battery capacity guarantees operation that goes far beyond the guarantee time. If the watch is opened before 2 years from the date of purchase, the warranty is void.

Note: _____

Note: _____



This manual is 100% recyclable.
Please waste properly or keep it for
future reference.



PAPER - WASTE SORTING

Check the instructions of your
municipality or the authorized facilities

Manuale - PAP - Raccolta Carta
Verifica le disposizioni del tuo Comune.



FR

ARTICLES
DE SPORT



ASSOCIATION



MAGASIN



DÉCHÈTERIE



FR



QUALITY PRODUCTS
SINCE 1946

Cressi Italy Headquarters

Cressi Sub S.P.A.
Via G. Adamoli, 501
16165 Genova - Italy
Tel. +39 010 830 791
info@cressi.com

